
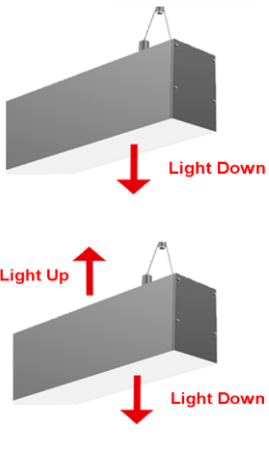


## ELGANT up/down, down

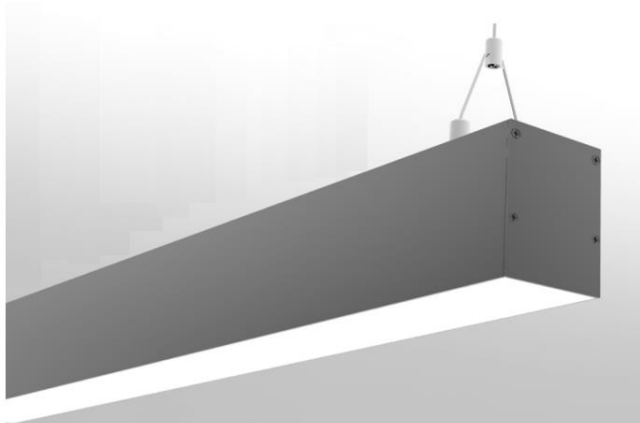

Optics: Frosted Polycarbonate  
Material: Anodized aluminum  
Light Source: LED

### Characteristics

Dimensions: L: 1190mm W: 54mm H: 75mm  
Weight: 1,6kg  
Ingress protection: IP44  
Impact protection: N/A  
Protection class: I alt. II



### APPLICATION AREAS

- Offices
- Hotels
- Hospitals
- Stores



# SPECIFICATION

<b>Certified:</b>	No, IP44, luminaire complies with EN60598
<b>Light Source:</b>	LED
<b>Overvoltage protection:</b>	4 kV
<b>Programable version:</b>	DALI, 0-10V
<b>Non programable versions:</b>	28W
<b>Luminous Flux:</b>	100lm/W
<b>Corrolated light temperature:</b>	3000K,3500K,4000K
<b>CRI:</b>	CRI80
<b>SDCM:</b>	>4
<b>Lifetime according L90/B10</b>	50,000h IESNA LM80
<b>Operational temperature range:</b>	-35° to +35°C
<b>Maintenance:</b>	Non replaceable
<b>Mains voltage:</b>	100-240 V AC/50-60 Hz
<b>EMC:</b>	Driver/luminaire according EN55015,EN61000-2-3,EN61547
<b>Optics:</b>	Frosted polycarbonate
<b>Material:</b>	Aluminum, stainless steel, polycarbonate
<b>Weight:</b>	1,5kg - 3,00 kg
<b>Color:</b>	Aluminum
<b>Mounting /bracket:</b>	Wire pending, wallmounted, ceiling monted
<b>Recomende mounting heoght:</b>	2m - 6m depending on power and purpose
<b>Mounted installation cable:</b>	Yes, 3m with European powerplug

Item no:	Dimensions	LEDs	Power	Lumen
LSD01-120 28W	1190mm*75mm*54 mm	260pcs	28W	3360lm
<b>Accessories</b>				
01-B	Pending wire	2pcs x 1m		
01-E	Connection bracket	Lenght3cm		

