


LYON LED

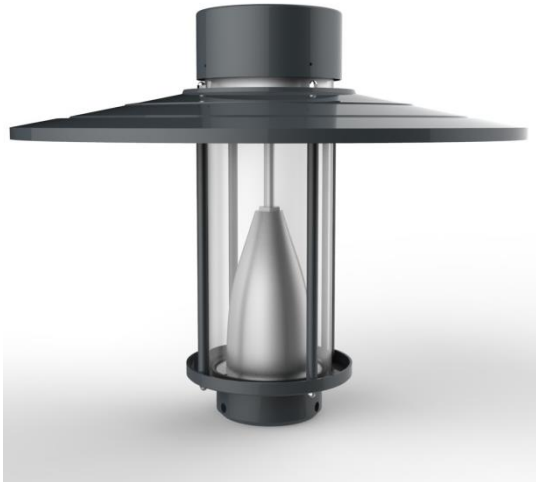

Optic: Lenses
Material: Aluminum
Source: LED

Characteristics

Dimensions: Ø: 740mm Height: 600mm
Weight: 7,2kg
Ingress Protection: IP54
Impact protection: IK08
Protection class: I/II IEC-EN60598



APPLICATION AREAS

Parks
Parking spaces
Residential
Square

BUSINESS CENTER

Small roads
Bicycle path

SPECIFICATION

Certified:	No, luminaire according EN60598-2-3
Future safe and automated service:	No
Light source:	LED
Over Voltage protection::	4kV / 10kV
Programmable versions:	DALI, 0-10V
Non programmable versions:	45W, adjustable 30-45W
Light output:	Glass version 4000K 100-120 lm/W Glass version 3000K 90-110 lm/W
Light color temperature:	4000K / 3000K
Color rendering index:	CRI70
SDCM:	>5
Lumen maintenance according L80F10:	100,000h alt 125.000h,
Lumen maintenance according L70	175,000h alt 200.000h, IESNA LM80
Surrounding temperature:	-30° to +30°
Driver/LEDs underhåll:	Replaceable
Mains power:	220-240 V AC/50-60 Hz
EMC:	Driver/lum. accord. EN55015,EN61000-2-3,EN61547
Optics:	Lenses, lenses + reflector
Materials:	Aluminum, stainless steel
Weight:	7,2kg
Color housing:	Dark grey (RAL7016)
Pole assembly:	-
Recommended mounting height:	Ø60 3m – 6m
Minimum mounting height:	3m (to ensure photobiological safety)
Mounted installation cable:	Yes

