


ROCCA LED

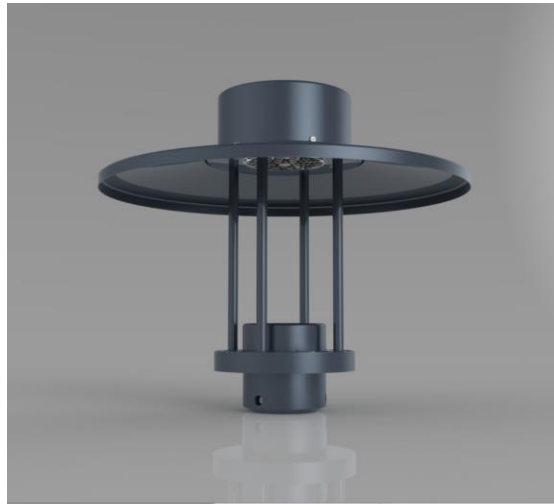

Optics: Lenses
Material: Aluminum, stainless steel, polycarbonate
Source: LED

Specification

Dimensions:	Ø = 580mm H = 497mm
Weight:	6,7kg
Ingress Protection	IP66
Impact protection	IK08
Protection class	I / II EU, IEC-EN60598



APPLICATION AREAS

- Parks
- Roads, Streets
- Pathways
- Parkinglots
- Residential areas
- Squares
- Buisness centers

SPECIFICATION

Certified:	No, luminaire complies with EN60598-2-3
Futureproof for automated maintenance:	No
Light source:	LED
Overvoltage protection:	4kV / 10kV
Programmable version:	DALI, 0-10V
Non programmable version:	36W
Light output:	AIR version 4000K 110-140 lm/W AIR version 3000K 100-135 lm/W
Correlated light temperature:	4000K or 3000K
Color rendering index:	CRI70
SDCM:	>5
Service life according L80	100,000h or 125.000h, depending on power (25 °C)
Service life according L70	175,000h alt 200.000h, depending on power (25 °C)
	IESNA LM80
Operating temperature range:	-40° to +30°C
Driver/LEDs maintenance:	Replaceable
Mains Voltage:	220-240 V AC/50-60 Hz
EMC:	Driver/luminaire according EN55015,EN61000-2-3,EN61547
Optics:	Lenses
Material:	Aluminum, stainless steel, polycarbonate
Weight:	6,7kg
Color housing:	Dark gray RAL7016
Mounting:	Ø60 top mounted
Recommended mounting height:	3m – 6m
Minimum mounting height:	3m (to ensure photobiological safety)
Max SCx:	0,075m ²
Mounted installation cable:	Yes

